


TEMPERATURE COMPENSATED CRYSTAL OSCILLATOR STO-3225, STV-3225



Applications

- Cellular / PHS / GPS Communication Equipment

Features

- Ultra thin / Dimensions(3.2 X 2.5 X 0.9)
- Seam sealed
- Low phase noise / Low power consumption
- High Stability $\pm 2.5\text{ppm} / -40^{\circ}\text{C} \sim +85^{\circ}\text{C}$


Specifications




Model	STO-3225	STV-3225	
Frequency range	8~52 MHz		
Nominal frequency(MHz)	8, 10, 13, 14.4, 16.367, 19.2, 19.8, 20, 24.5535, 26, 39, 40, 44, 50		
Frequency stability	Tolerance at 25°C	$\pm 2.0 \times 10^{-6}$ (Sixty minutes after reflow)	
	Temperature (Ref. to 25°C)	$\pm 2.5 \times 10^{-6} / -40 \sim 85^{\circ}\text{C}$	
	Supply voltage change	$\pm 0.2 \times 10^{-6} / V_{\text{dd}} \pm 5\%$	
	Load change	$\pm 0.2 \times 10^{-6} / Z_L \pm 10\%$	
Aging (at 25°C)	$\pm 1.0 \times 10^{-6} / \text{First year}$		
Storage temperature range	$-40 \sim 85^{\circ}\text{C}$		
Power supply voltage (Vcc)	$\pm 1.8 \sim +3.3\text{V DC} \pm 5\%$		
Current consumption	1.5mA max.(~26MHz), 2.0mA max.(~32MHz), 2.5mA max.(~52MHz)		
Output	Load (ZL)	10kΩ // 10 pF	
	Voltage	0.8V p-p min.	
	Waveform	Clipped Sine Wave (DC-coupled output)	
External control function	Frequency tuning range	—	$\pm 8.0 \times 10^{-6}$ min. (Positive)
	External control voltage	—	$+1.5\text{V} \pm 1.0\text{V DC} / +0.9\text{V} \pm 0.9\text{V DC}$
	Input impedance(Zvin)	—	500kΩ min. (650kΩ typ.)
Phase noise	$-135\text{dBc typ. at } 1\text{kHz offset}$		

Package quantity: 3000pcs max./Reel.

Outline and Dimensions[unit:mm]

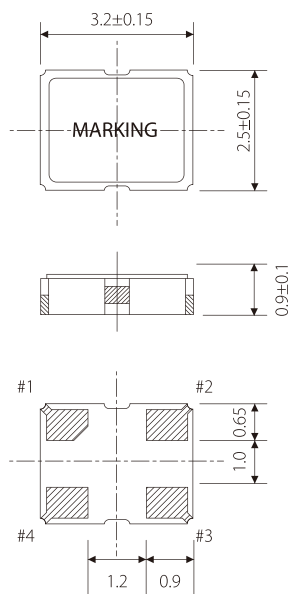

Example of a Terminal Land Pattern

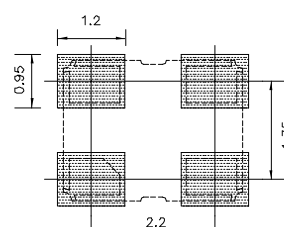

Terminal	Connection	
	TCXO	VC-TCXO
#1	GND	Vcont
#2	GND	
#3	OUTPUT	
#4	Vdd	